WIKIPEDIA
The Free Encyclopedia

Fiber-optic communication

Fiber-optic communication is a method of transmitting information from one place to another by sending pulses of infrared or visible light through an optical fiber.[1][2] The light is a form of carrier wave that is modulated to carry information.[3] Fiber is preferred over electrical cabling when high bandwidth, long distance, or immunity to electromagnetic interference is required.[4] This type of communication can transmit voice, video, and telemetry through local area networks or across long distances.[5]

Optical fiber is used by many telecommunications companies to transmit telephone signals, internet communication, and cable television signals. Researchers at Bell Labs have reached a record bandwidth–distance product of over 100 petabit × kilometers per second using fiber-optic communication.[6]

An optical fiber patching cabinet. The yellow cables are single mode fibers; the orange and blue cables are multi-mode fibers: 62.5/125 µm OM1 and 50/125 µm OM3 fibers, respectively.

Background

First developed in the 1970s, fiber-optics have revolutionized the telecommunications industry and have played a major role in the advent of the Information Age.[7] Because of its advantages over electrical transmission, optical fibers have largely replaced copper wire communications in backbone networks in the developed world.[8]

The process of communicating using fiber optics involves the following basic steps:

1. creating the optical signal involving the use of a transmitter,[9] usually from an electrical signal
2. relaying the signal along the fiber, ensuring that the signal does not become too distorted or weak
3. receiving the optical signal
4. converting it into an electrical signal

Stealth Communications fiber crew installing a 432-count dark fiber cable underneath the streets of Midtown Manhattan, New York City

Applications

Optical fiber is used by telecommunications companies to transmit telephone signals, Internet communication and cable television signals. It is also used in other industries, including medical, defense, government, industrial and commercial. In addition to serving the purposes of telecommunications, it is used as light guides, for imaging tools, lasers, hydrophones for seismic waves, SONAR, and as sensors to measure pressure and temperature.

Due to lower attenuation and interference, optical fiber has advantages over copper wire in long-distance, high-bandwidth applications. However, infrastructure development within cities is relatively difficult and time-consuming, and fiber-optic systems can be complex and expensive to install and operate. Due to these difficulties, early fiber-optic communication systems were primarily installed in long-distance applications, where they can be used to their full transmission capacity, offsetting the increased cost. The prices of fiber-optic communications have dropped considerably since 2000.[10]

The price for rolling out fiber to homes has currently become more cost-effective than that of rolling out a copper-based network. Prices have dropped to $850 per subscriber in the US and lower in countries like The Netherlands, where digging costs are low and housing density is high.

Since 1990, when optical-amplification systems became commercially available, the telecommunications industry has laid a vast network of intercity and transoceanic fiber communication lines. By 2002, an intercontinental network of 250,000 km of submarine communications cable with a capacity of 2.56 Tb/s was completed, and although specific network capacities are privileged information, telecommunications investment reports indicate that network capacity has increased dramatically since 2004.[11] As of 2020, over 5 billion kilometers of fiber-optic cable has been deployed around the globe.[12]

History

In 1880 Alexander Graham Bell and his assistant Charles Sumner Tainter created a very early precursor to fiber-optic communications, the Photophone, at Bell's newly established Volta Laboratory in Washington, D.C. Bell considered it his most important invention. The device allowed for the transmission of sound on a beam of light. On June 3, 1880, Bell conducted the world's first wireless telephone transmission between two buildings, some 213 meters apart.[13][14] Due to its use of an atmospheric transmission medium, the Photophone would not prove practical until advances in laser and optical fiber technologies permitted the secure transport of light. The Photophone's first practical use came in military communication systems many decades later.[15]

In 1954 Harold Hopkins and Narinder Singh Kapany showed that rolled fiber glass allowed light to be transmitted.[16] Jun-ichi Nishizawa, a Japanese scientist at Tohoku University, proposed the use of optical fibers for communications in 1963.[17] Nishizawa invented the PIN diode and the static induction transistor, both of which contributed to the development of optical fiber communications.[18][19]

In 1966 Charles K. Kao and George Hockham at Standard Telecommunication Laboratories showed that the losses of 1,000 dB/km in existing glass (compared to 5–10 dB/km in coaxial cable) were due to contaminants which could potentially be removed.

Optical fiber with attenuation low enough for communication purposes (about 20 dB/km) was developed in 1970 by Corning Glass Works. At the same time, GaAs semiconductor lasers were developed that were compact and therefore suitable for transmitting light through fiber optic cables for long distances.

In 1973, Optelecom, Inc., co-founded by the inventor of the laser, Gordon Gould, received a contract from ARPA for one of the first optical communication systems. Developed for Army Missile Command in Huntsville, Alabama, the system was intended to allow a short-range missile with video processing to communicate by laser to the ground by means of a five-kilometer long optical fiber that unspooled from the missile as it flew.[20] Optelecom then delivered the first commercial optical communications system to Chevron.[21]

After a period of research starting from 1975, the first commercial fiber-optic telecommunications system was developed which operated at a wavelength around 0.8 μm and used GaAs semiconductor lasers. This first-generation system operated at a bit rate of 45 Mbit/s with repeater spacing of up to 10 km. Soon on 22 April 1977, General Telephone and Electronics sent the first live telephone traffic through fiber optics at a 6 Mbit/s throughput in Long Beach, California.

In October 1973, Corning Glass signed a development contract with CSELT and Pirelli aimed to test fiber optics in an urban environment: in September 1977, the second cable in this test series, named COS-2, was experimentally deployed in two lines (9 km) in Turin, for the first time in a big city, at a speed of 140 Mbit/s.[22]

The second generation of fiber-optic communication was developed for commercial use in the early 1980s, operated at 1.3 μm and used InGaAsP semiconductor lasers. These early systems were initially limited by multi-mode fiber dispersion, and in 1981 the single-mode fiber was revealed to greatly improve system performance, however practical connectors capable of working with single mode fiber proved difficult to develop. Canadian service provider SaskTel had completed construction of what was then the world's longest commercial fiber optic network, which covered 3,268 km (2,031 mi) and linked 52 communities.[23] By 1987, these systems were operating at bit rates of up to 1.7 Gbit/s with repeater spacing up to 50 km (31 mi).

The first transatlantic telephone cable to use optical fiber was TAT-8, based on Desurvire optimized laser amplification technology. It went into operation in 1988.

Third-generation fiber-optic systems operated at 1.55 μm and had losses of about 0.2 dB/km. This development was spurred by the discovery of indium gallium arsenide and the development of the indium gallium arsenide photodiode by Pearsall. Engineers overcame earlier difficulties with pulse-spreading using conventional InGaAsP semiconductor lasers at that wavelength by using dispersion-shifted fibers designed to have minimal dispersion at 1.55 μm or by limiting the laser spectrum to a single longitudinal mode. These developments eventually allowed third-generation systems to operate commercially at 2.5 Gbit/s with repeater spacing in excess of 100 km (62 mi).

The fourth generation of fiber-optic communication systems used optical amplification to reduce the need for repeaters and wavelength-division multiplexing (WDM) to increase data capacity. The introduction of WDM was the start of optical networking, as WDM became the technology of choice for fiber-optic bandwidth expansion.[24] The first to market with a dense WDM system was Ciena Corp., in June 1996.[25] The introduction of optical amplifiers and WDM caused system capacity to double every six months from 1992 until a bit rate of 10 Tb/s was reached by 2001. In 2006 a bit-rate of 14 Tb/s was reached over a single 160 km (99 mi) line using optical amplifiers.[26] As of 2021, Japanese scientists transmitted 319 terabits per second over 3,000 kilometers with four-core fiber cables with standard cable diameter.[27]

The focus of development for the fifth generation of fiber-optic communications is on extending the wavelength range over which a WDM system can operate. The conventional wavelength window, known as the C band, covers the wavelength range 1525–1565 nm, and *dry fiber* has a low-loss window promising an extension of that range to 1300–1650 nm. Other developments include the concept of *optical solitons*, pulses that preserve their shape by counteracting the effects of dispersion with the nonlinear effects of the fiber by using pulses of a specific shape.

In the late 1990s through 2000, industry promoters, and research companies such as KMI, and RHK predicted massive increases in demand for communications bandwidth due to increased use of the Internet, and commercialization of various bandwidth-intensive consumer services, such as video on demand. Internet Protocol data traffic was increasing exponentially, at a faster rate than integrated circuit complexity had increased under Moore's Law. From the bust of the dot-com bubble through 2006, however, the main trend in the industry has been consolidation of firms and offshoring of manufacturing to reduce costs. Companies such as Verizon and AT&T have taken advantage of fiber-optic communications to deliver a variety of high-throughput data and broadband services to consumers' homes.

Technology

Modern fiber-optic communication systems generally include optical transmitters that convert electrical signals into optical signals, optical fiber cables to carry the signal, optical amplifiers, and optical receivers to convert the signal back into an electrical signal. The information transmitted is typically digital information generated by computers or telephone systems.

Transmitters

The most commonly used optical transmitters are semiconductor devices such as light-emitting diodes (LEDs) and laser diodes. The difference between LEDs and laser diodes is that LEDs produce incoherent light, while laser diodes produce coherent light. For use in optical communications, semiconductor optical transmitters must be designed to be compact, efficient and reliable, while operating in an optimal wavelength range and directly modulated at high frequencies.

A GBIC module (shown here with its cover removed), is an optical and electrical transceiver, a device combining a transmitter and a receiver in a single housing. The electrical connector is at top right and the optical connectors are at bottom left

In its simplest form, an LED emits light through spontaneous emission, a phenomenon referred to as electroluminescence. The emitted light is incoherent with a relatively wide spectral width of 30–60 nm.[a] The large spectrum width of LEDs is subject to higher fiber dispersion, considerably limiting their bit rate-distance product (a common measure of usefulness). LEDs are suitable primarily for local-area-network applications with bit rates of 10–100 Mbit/s and transmission distances of a few kilometers.

LED light transmission is inefficient, with only about 1% of input power, or about 100 microwatts, eventually converted into launched power coupled into the optical fiber.[28]

LEDs have been developed that use several quantum wells to emit light at different wavelengths over a broad spectrum and are currently in use for local-area wavelength-division multiplexing (WDM) applications.

LEDs have been largely superseded by vertical-cavity surface-emitting laser (VCSEL) devices, which offer improved speed, power and spectral properties, at a similar cost. However, due to their relatively simple design, LEDs are very useful for very low-cost applications. Commonly used classes of semiconductor laser transmitters used in fiber optics include VCSEL, Fabry–Pérot and distributed-feedback laser.

A semiconductor laser emits light through stimulated emission rather than spontaneous emission, which results in high output power (~100 mW) as well as other benefits related to the nature of coherent light. The output of a laser is relatively directional, allowing high coupling efficiency (~50%) into single-mode fiber. Common VCSEL devices also couple well to multimode fiber. The narrow spectral width also allows for high bit rates since it reduces the effect of chromatic dispersion. Furthermore, semiconductor lasers can be modulated directly at high frequencies because of short recombination time.

Laser diodes are often directly modulated, that is the light output is controlled by a current applied directly to the device. For very high data rates or very long distance links, a laser source may be operated continuous wave, and the light modulated by an external device, an optical modulator, such as an electro-absorption modulator or Mach–Zehnder interferometer. External modulation increases the achievable link distance by eliminating laser chirp, which broadens the linewidth in directly modulated lasers, increasing the chromatic dispersion in the fiber. For very high bandwidth efficiency, coherent modulation can be used to vary the phase of the light in addition to the amplitude, enabling the use of QPSK, QAM, and OFDM. "Dual-polarization quadrature phase shift keying is a modulation format that effectively sends four times as much information as traditional optical transmissions of the same speed."[29]

Receivers

The main component of an optical receiver is a photodetector which converts light into electricity using the photoelectric effect. The primary photodetectors for telecommunications are made from Indium gallium arsenide. The photodetector is typically a semiconductor-based photodiode. Several types of photodiodes include p-n photodiodes, p-i-n photodiodes, and avalanche photodiodes. Metal-semiconductor-metal (MSM) photodetectors are also used due to their suitability for circuit integration in regenerators and wavelength-division multiplexers.

Since light may be attenuated and distorted while passing through the fiber, photodetectors are typically coupled with a transimpedance amplifier and a limiting amplifier to produce a digital signal in the electrical domain recovered from the incoming optical signal. Further signal processing such as clock recovery from data performed by a phase-locked loop may also be applied before the data is passed on.

Coherent receivers use a local oscillator laser in combination with a pair of hybrid couplers and four photodetectors per polarization, followed by high-speed ADCs and digital signal processing to recover data modulated with QPSK, QAM, or OFDM.

Digital predistortion

An optical communication system transmitter consists of a digital-to-analog converter (DAC), a driver amplifier and a Mach–Zehnder modulator. The deployment of higher modulation formats (>4-QAM) or higher baud Rates (>32 GBd) diminishes the system performance due to linear and non-linear transmitter effects. These effects can be categorized as linear distortions due to DAC bandwidth limitation and transmitter I/Q skew as well as non-linear effects caused by gain saturation in the driver amplifier and the Mach–Zehnder modulator. Digital predistortion counteracts the degrading effects and enables Baud rates up to 56 GBd and modulation formats like 64-QAM and 128-QAM with the commercially available components. The transmitter digital signal processor performs digital predistortion on the input signals using the inverse transmitter model before sending the samples to the DAC.

Older digital predistortion methods only addressed linear effects. Recent publications also consider non-linear distortions. *Berenguer et al* models the Mach–Zehnder modulator as an independent Wiener system and the DAC and the driver amplifier are modeled by a truncated, time-invariant Volterra series.[30] *Khanna et al* use a memory polynomial to model the transmitter components jointly.[31] In both approaches the Volterra series or the memory polynomial coefficients are found using indirect-learning architecture. *Duthel et al* records, for each branch of the Mach-Zehnder modulator, several signals at different polarity and phases. The signals are used to calculate the optical field. Cross-correlating in-phase and quadrature fields identifies the timing skew. The frequency response and the non-linear effects are determined by the indirect-learning architecture.[32]

Fiber cable types

An optical fiber cable consists of a core, cladding, and a buffer (a protective outer coating), in which the cladding guides the light along the core by using the method of total internal reflection. The core and the cladding (which has a lower-refractive-index) are usually made of high-quality silica glass, although they can both be made of plastic as well. Connecting two optical fibers is done by fusion splicing or mechanical splicing and requires special skills and interconnection technology due to the microscopic precision required to align the fiber cores.[33]

A cable reel trailer with conduit that can carry optical fiber

Two main types of optical fiber used in optic communications include multi-mode optical fibers and single-mode optical fibers. A multi-mode optical fiber has a larger core (≥ 50 micrometers), allowing less precise, cheaper transmitters and receivers to connect to it as well as cheaper connectors. However, a multi-mode fiber introduces multimode distortion, which often limits the bandwidth and length of the link. Furthermore, because of its higher dopant content, multi-mode fibers are usually expensive and exhibit higher attenuation. The core of a single-mode fiber is smaller (< 10 micrometers) and requires more expensive components and interconnection methods, but allows much longer and higher-performance links. Both single- and multi-mode fiber is offered in different grades.

Multi-mode optical fiber in an underground service pit

Comparison of fiber grades[34]

Fibre type	Introduced	Performance
MMF FDDI 62.5/125 µm	1987	160 MHz·km @ 850 nm
MMF OM1 62.5/125 µm	1989	200 MHz·km @ 850 nm
MMF OM2 50/125 µm	1998	500 MHz·km @ 850 nm
MMF OM3 50/125 µm	2003	1500 MHz·km @ 850 nm
MMF OM4 50/125 µm	2008	3500 MHz·km @ 850 nm
MMF OM5 50/125 µm	2016	3500 MHz·km @ 850 nm + 1850 MHz·km @ 950 nm
SMF OS1 9/125 µm	1998	1.0 dB/km @ 1300/1550 nm
SMF OS2 9/125 µm	2000	0.4 dB/km @ 1300/1550 nm

In order to package fiber into a commercially viable product, it typically is protectively coated by using ultraviolet cured acrylate polymers and assembled into a cable. After that, it can be laid in the ground and then run through the walls of a building and deployed aerially in a manner similar to copper cables. These fibers require less maintenance than common twisted pair wires once they are deployed.[35]

Specialized cables are used for long-distance subsea data transmission, e.g. transatlantic communications cable. New (2011–2013) cables operated by commercial enterprises (Emerald Atlantis, Hibernia Atlantic) typically have four strands of fiber and signals cross the Atlantic (NYC-London) in 60–70 ms. The cost of each such cable was about $300M in 2011.[36]

Another common practice is to bundle many fiber optic strands within long-distance power transmission cable using, for instance, an optical ground wire. This exploits power transmission rights of way effectively, ensures a power company can own and control the fiber required to monitor its own devices and lines, is effectively immune to tampering, and simplifies the deployment of smart grid technology.

Amplification

The transmission distance of a fiber-optic communication system has traditionally been limited by fiber attenuation and by fiber distortion. By using optoelectronic repeaters, these problems have been eliminated. These repeaters convert the signal into an electrical signal and then use a transmitter to send the signal again at a higher intensity than was received, thus counteracting the loss incurred in the previous segment. Because of the high complexity with modern wavelength-division multiplexed signals, including the fact that they had to be installed about once every 20 km (12 mi), the cost of these repeaters is very high.

An alternative approach is to use optical amplifiers which amplify the optical signal directly without having to convert the signal to the electrical domain. One common type of optical amplifier is an erbium-doped fiber amplifier (EDFA). These are made by doping a length of fiber with the rare-earth mineral erbium and laser pumping it with light with a shorter wavelength than the communications signal (typically 980 nm). EDFAs provide gain in the ITU C band at 1550 nm.

Optical amplifiers have several significant advantages over electrical repeaters. First, an optical amplifier can amplify a very wide band at once which can include hundreds of multiplexed channels, eliminating the need to demultiplex signals at each amplifier. Second, optical amplifiers operate independently of the data rate and modulation format, enabling multiple data rates and modulation formats to co-exist and enabling

upgrading of the data rate of a system without having to replace all of the repeaters. Third, optical amplifiers are much simpler than a repeater with the same capabilities and are therefore significantly more reliable. Optical amplifiers have largely replaced repeaters in new installations, although electronic repeaters are still widely used when signal conditioning beyond amplification is required.

Wavelength-division multiplexing

Wavelength-division multiplexing (WDM) is the technique of transmitting multiple channels of information through a single optical fiber by sending multiple light beams of different wavelengths through the fiber, each modulated with a separate information channel. This allows the available capacity of optical fibers to be multiplied. This requires a wavelength division multiplexer in the transmitting equipment and a demultiplexer (essentially a spectrometer) in the receiving equipment. Arrayed waveguide gratings are commonly used for multiplexing and demultiplexing in WDM.[37] Using WDM technology now commercially available, the bandwidth of a fiber can be divided into as many as 160 channels[38] to support a combined bit rate in the range of 1.6 Tbit/s.

Parameters

Bandwidth–distance product

Because the effect of dispersion increases with the length of the fiber, a fiber transmission system is often characterized by its *bandwidth–distance product*, usually expressed in units of MHz·km. This value is a product of bandwidth and distance because there is a trade-off between the bandwidth of the signal and the distance over which it can be carried. For example, a common multi-mode fiber with bandwidth–distance product of 500 MHz·km could carry a 500 MHz signal for 1 km or a 1000 MHz signal for 0.5 km.

Record speeds

Using wavelength-division multiplexing, each fiber can carry many independent channels, each using a different wavelength of light. The net data rate (data rate without overhead bytes) per fiber is the per-channel data rate reduced by the forward error correction (FEC) overhead, multiplied by the number of channels (usually up to eighty in commercial dense WDM systems as of 2008).

Standard fiber cables

The following summarizes research using standard telecoms-grade single-mode, single-solid-core fiber cables.

Year	Organization	Aggregate speed	Propagation modes	WDM channels	Per-channel speed	Distance
2009	Alcatel-Lucent[39]	15.5 Tbit/s		155	100 Gbit/s	7000 km
2010	NTT[40]	69.1 Tbit/s		432	171 Gbit/s	240 km
2011	NEC[41]	101.7 Tbit/s		370	273 Gbit/s	165 km
2011[A]	KIT[42][43]	26 Tbit/s		336	77 Gbit/s	50 km
2016	BT & Huawei[44]	5.6 Tbit/s		28	200 Gbit/s	about 140 km ?
2016[B]	Nokia Bell Labs, Deutsche Telekom & Technical University of Munich[45]	1 Tbit/s		1	1 Tbit/s	
2016	Nokia-Alcatel-Lucent[46]	65 Tbit/s				6600 km
2017	BT & Huawei[47]	11.2 Tbit/s		28	400 Gbit/s	250 km
2020[A]	RMIT, Monash & Swinburne Universities[48][49]	39.0 Tbit/s		160	244 Gbit/s	76.6 km
2020	UCL[50]	178.08 Tbit/s		**660**	25 Gbit/s	40 km
2022	NICT[51][52][53]	**1.53 Pbit/s**	55 (110-MIMO multiplexer)	184 (C-band)	**1.03 Tbit/s**	25.9 km

A. Used a single source to drive all channels.
B. First result that pushes close to the Shannon theoretical limit.

Specialized cables

The following summarizes research using specialized cables that allow spatial multiplexing to occur, use specialized tri-mode fiber cables or similar specialized fiber optic cables.

Year	Organization	Aggregate speed	No. of propagation modes	No. of cores	WDM channels (per core)	Per channel speed	Distance
2011	NICT[41]	109.2 Tbit/s		7			
2012	NEC, Corning[54]	1.05 Pbit/s		12			52.4 km
2013	University of Southampton[55]	73.7 Tbit/s		1 (hollow)	3x96 (mode DM)[56]	256 Gbit/s	310 m
2014	Technical University of Denmark[57]	43 Tbit/s		7			1045 km
2014	Eindhoven University of Technology (TU/e) and University of Central Florida (CREOL)[58]	255 Tbit/s		7	50	**~728 Gbit/s**	1 km
2015	NICT, Sumitomo Electric and RAM Photonics[59]	2.15 Pbit/s		22	402 (C+L bands)	243 Gbit/s	31 km
2017	NTT[60]	1 Pbit/s	single-mode	32	46	680 Gbit/s	205.6 km
2017	KDDI Research and Sumitomo Electric[61]	**10.16 Pbit/s**	**6-mode**	19	739 (C+L bands)	120 Gbit/s	11.3 km
2018[A]	NICT[62]	159 Tbit/s	tri-mode	1	348	414 Gbit/s	1045 km
2021	NICT[63]	319 Tbit/s	single-mode	4	552 (S, C & L bands)	144.5 Gbit/s	**3001 km (69.8 km)**
2022	NICT[64][65][66]	1.02 Pbit/s		4	**801** (S+C+L bands)		51.7 km
2022[B]	Technical University of Denmark[67][68]	1.84 Pbit/s		**37**	223	223 Gbit/s	7.9 km

A. New record for throughput using a single core cable, that is, not using spatial multiplexing.
B. New record for throughput using a photonic chip.

New techniques

Research from DTU, Fujikura and NTT is notable in that the team was able to reduce the power consumption of the optics to around 5% compared with more mainstream techniques, which could lead to a new generation of very power-efficient optic components.

Year	Organization	Effective speed	No. of Propagation Modes	No. of cores	WDM channels (per core)	Per channel speed	Distance
2018	Hao Hu, et al. (DTU, Fujikura & NTT)[69]	768 Tbit/s (661 Tbit/s)	Single-mode	30	80	320 Gbit/s	

Research conducted by the RMIT University, Melbourne, Australia, have developed a nanophotonic device that carries data on light waves that have been twisted into a spiral form and achieved a 100-fold increase in current attainable fiber optic speeds.[70] The technique is known as orbital angular momentum (OAM). The nanophotonic device uses ultra-thin sheets to measure a fraction of a millimeter of twisted light. Nano-electronic device is embedded within a connector smaller than the size of a USB connector and may be fitted at the end of an optical fiber cable.[71]

Dispersion

For modern glass optical fiber, the maximum transmission distance is limited not by direct material absorption but by dispersion, the spreading of optical pulses as they travel along the fiber. Dispersion limits the bandwidth of the fiber because the spreading optical pulse limits the rate which pulses can follow one another on the fiber and still be distinguishable at the receiver. Dispersion in optical fibers is caused by a variety of factors.

Intermodal dispersion, caused by the different axial speeds of different transverse modes, limits the performance of multi-mode fiber. Because single-mode fiber supports only one transverse mode, intermodal dispersion is eliminated.

In single-mode fiber performance is primarily limited by chromatic dispersion, which occurs because the index of the glass varies slightly depending on the wavelength of the light, and, due to modulation, light from optical transmitters necessarily occupies a (narrow) range of wavelengths. Polarization mode dispersion, another source of limitation, occurs because although the single-mode fiber can sustain only one transverse mode, it can carry this mode with two different polarizations, and slight imperfections or distortions in a fiber can alter the propagation velocities for the two polarizations. This phenomenon is called birefringence and can be counteracted by polarization-maintaining optical fiber.

Some dispersion, notably chromatic dispersion, can be removed by a dispersion compensator. This works by using a specially prepared length of fiber that has the opposite dispersion to that induced by the transmission fiber, and this sharpens the pulse so that it can be correctly decoded by the electronics.

Attenuation

Fiber attenuation is caused by a combination of material absorption, Rayleigh scattering, Mie scattering, and losses in connectors. Material absorption for pure silica is only around 0.03 dB/km. Impurities in early optical fibers caused attenuation of about 1000 dB/km. Modern fiber has attenuation around 0.3 dB/km. Other forms of attenuation are caused by physical stresses to the fiber, microscopic fluctuations in density, and imperfect splicing techniques.[72]

Transmission windows

Each effect that contributes to attenuation and dispersion depends on the optical wavelength. There are wavelength bands (or windows) where these effects are weakest, and these are the most favorable for transmission. These windows have been standardized.[73]

Standard bands for optical fiber communications

Band	Description	Wavelength range
O band	Original	1260–1360 nm
E band	Extended	1360–1460 nm
S band	Short wavelengths	1460–1530 nm
C band	Conventional (*erbium window*)	1530–1565 nm
L band	Long wavelengths	1565–1625 nm
U band	Ultralong wavelengths	1625–1675 nm

Note that this table shows that current technology has managed to bridge the E and S windows that were originally disjoint.

Historically, there was a window of wavelengths shorter than O band, called the first window, at 800–900 nm; however, losses are high in this region so this window is used primarily for short-distance communications. The current lower windows (O and E) around 1300 nm have much lower losses. This region has zero dispersion. The middle windows (S and C) around 1500 nm are the most widely used. This region has the lowest attenuation losses and achieves the longest range. It does have some dispersion, so dispersion compensator devices are used to address this.

Regeneration

When a communications link must span a larger distance than existing fiber-optic technology is capable of, the signal must be *regenerated* at intermediate points in the link by optical communications repeaters. Repeaters add substantial cost to a communication system, and so system designers attempt to minimize their use.

Recent advances in fiber and optical communications technology have reduced signal degradation to the point that *regeneration* of the optical signal is only needed over distances of hundreds of kilometers. This has greatly reduced the cost of optical networking, particularly over undersea spans where the cost and reliability of repeaters is one of the key factors determining the performance of the whole cable system. The main advances contributing to these performance improvements are dispersion management, which seeks to balance the effects of dispersion against non-linearity; and solitons, which use nonlinear effects in the fiber to enable dispersion-free propagation over long distances.

Last mile

Although fiber-optic systems excel in high-bandwidth applications, the last mile problem remains unsolved as fiber to the premises has experienced slow uptake. However, fiber to the home (FTTH) deployment has accelerated. In Japan, for instance EPON has largely replaced DSL as a broadband Internet source. The largest FTTH deployments are in Japan, South Korea, and China. Singapore started implementation of their all-fiber Next Generation Nationwide Broadband Network (Next Gen NBN), which is slated for completion in 2012 and is being installed by OpenNet. Since they began rolling out services in September 2010, network coverage in Singapore has reached 85% nationwide.

In the US, Verizon Communications provides a FTTH service called FiOS to selected high-average-revenue-per-user markets within its existing territory. The other major surviving incumbent local exchange carrier, AT&T, uses a fiber to the node (FTTN) service called U-verse with twisted-pair to the home. Their MSO competitors employ FTTN with coax using hybrid fiber-coaxial networks. All of the major access networks use fiber for the bulk of the distance from the service provider's network to the customer.

The globally dominant access network technology is Ethernet passive optical network (EPON). In Europe, and among telcos in the United States, ATM-based Broadband PON (BPON) and Gigabit PON (GPON) had roots in the Full Service Access Network (FSAN) and ITU-T standards organizations under their control.

Comparison with electrical transmission

The choice between optical fiber and electrical (or copper) transmission for a particular system is made based on a number of trade-offs. Optical fiber is generally chosen for systems requiring higher bandwidth, operating in harsh environments or spanning longer distances than electrical cabling can accommodate.

A mobile fiber optic splice lab used to access and splice underground cables

The main benefits of fiber are its exceptionally low loss (allowing long distances between repeaters), its absence of ground currents and other parasite signal and power issues common to long parallel electric conductor runs (due to its reliance on light rather than electricity for transmission, and the dielectric nature of fiber optic), and its inherently high data-carrying capacity. Thousands of electrical links would be required to replace a single high-bandwidth fiber cable. Another benefit of fibers is that even when run alongside each other for long distances, fiber cables experience effectively no crosstalk, in contrast to some types of electrical transmission lines. Fiber can be installed in areas with high electromagnetic interference (EMI), such as alongside power lines, and railroad tracks. Nonmetallic all-dielectric cables are also ideal for areas of high lightning-strike incidence.

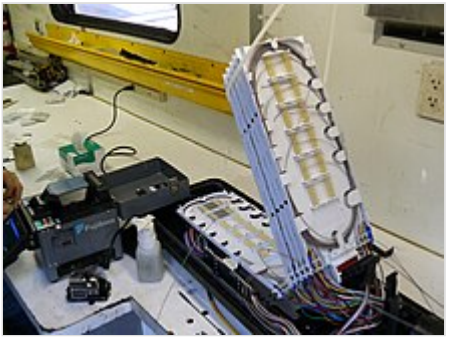

An underground fiber optic splice enclosure opened up

For comparison, while single-line, voice-grade copper systems longer than a couple of kilometers require in-line signal repeaters for satisfactory performance, it is not unusual for optical systems to go over 100 kilometers (62 mi), with no active or passive processing.

Optical fibers are more difficult and expensive to splice than electrical conductors. And at higher powers, optical fibers are susceptible to fiber fuse, resulting in catastrophic destruction of the fiber core and damage to transmission components.[74]

In short-distance and relatively low-bandwidth applications, electrical transmission is often preferred because of its lower cost. Optical communication is not common in short box-to-box, backplane, or chip-to-chip applications.

In certain situations, fiber may be used even for short-distance or low-bandwidth applications, due to other important features:

- Immunity to electromagnetic interference, including nuclear electromagnetic pulses.
- High electrical resistance, making it safe to use near high-voltage equipment or between areas with different earth potentials.
- Lighter weight—important, for example, in aircraft.
- No potential for arcing—important in flammable or explosive gas environments.[75]
- Not electromagnetically radiating, and difficult to tap without disrupting the signal—important in high-security environments.
- Much smaller cable size—important where the pathway is limited, such as networking an existing building, where smaller channels can be drilled and space can be saved in existing cable ducts and trays.
- Resistance to corrosion due to non-metallic transmission medium

Optical fiber cables can be installed in buildings using the same equipment that is used to install copper and coaxial cables, with some modifications due to the small size and limited allowable pull tension and bend radius of optical cables.

Governing standards

In order for various manufacturers to be able to develop components that function compatibly in fiber optic communication systems, a number of standards have been developed. The International Telecommunication Union publishes several standards related to the characteristics and performance of fibers themselves, including

- ITU-T G.651, "Characteristics of a 50/125 μm multimode graded index optical fibre cable"
- ITU-T G.652, "Characteristics of a single-mode optical fibre cable"

Other standards specify performance criteria for fiber, transmitters, and receivers to be used together in conforming systems. Some of these standards are:

- 100 Gigabit Ethernet
- 10 Gigabit Ethernet
- Fibre Channel
- Gigabit Ethernet
- HIPPI
- Synchronous Digital Hierarchy
- Synchronous Optical Networking
- Optical transport network (OTN)

TOSLINK is the most common format for digital audio cable using plastic optical fiber to connect digital sources to digital receivers.

See also

- Dark fiber
- Fiber to the x

- Free-space optical communication

Notes

a. Communications LEDs are most commonly made from Indium gallium arsenide phosphide (InGaAsP) or gallium arsenide (GaAs). Because InGaAsP LEDs operate at a longer wavelength than GaAs LEDs (1.3 micrometers vs. 0.81–0.87 micrometers), their output spectrum, while equivalent in energy is wider in wavelength terms by a factor of about 1.7.

References

1. "Understanding Wavelengths In Fiber Optics" (https://www.thefoa.org/tech/wavelength.htm). *thefoa.org*. Retrieved 2019-12-16.
2. McIntosh, Jane; Chrisp, Peter; Parker, Philip; Gibson, Carrie; Grant, R. G.; Regan, Sally (October 2014). *History of the World in 1,000 Objects*. New York: DK and the Smithsonian. p. 382. ISBN 978-1-4654-2289-7.
3. *Future Trends in Fiber Optics Communication* (http://www.iaeng.org/publication/WCE2014/WCE2014_pp438-442.pdf) (PDF). WCE, London UK. July 2, 2014. ISBN 978-988-19252-7-5.
4. "How Fiber Optics Work" (https://computer.howstuffworks.com/fiber-optic4.htm). *How Stuff Works*. 6 March 2001. Retrieved 27 May 2020.
5. "What are the Basic Elements of a Fibre Optic Communication System?" (https://web.archive.org/web/20200815104934/https://www.fibreoptic.com.au/basic-elements-fibre-optic-communication-system/). *FOS*. Archived from the original (https://www.fibreoptic.com.au/basic-elements-fibre-optic-communication-system/) on 15 August 2020. Retrieved 27 May 2020.
6. "Press release: Alcatel-Lucent Bell Labs announces new optical transmission record and breaks 100 Petabit per second kilometer barrier" (https://web.archive.org/web/20091018060720/http://www.alcatel-lucent.com/wps/portal/NewsReleases/Detail?LMSG_CABINET=Docs_and_Resource_Ctr&LMSG_CONTENT_FILE=News_Releases_2009%2FNews_Article_001797.xml&lu_lang_code=en). Alcatel-Lucent. September 28, 2009. Archived from the original (http://www.alcatel-lucent.com/wps/portal/NewsReleases/Detail?LMSG_CABINET=Docs_and_Resource_Ctr&LMSG_CONTENT_FILE=News_Releases_2009/News_Article_001797.xml&lu_lang_code=en) on October 18, 2009.
7. Alwayn, Vivek (April 23, 2004). "Fiber-Optic Technologies". *Optical Network Design and Implementation* (https://www.ciscopress.com/articles/article.asp?p=170740). Cisco Press. ISBN 978-1-58705-105-0. Retrieved 2020-08-08.
8. Jacoby, Mitch (March 16, 2020). "As telecom demands grow, optical fibers will need to level up" (https://cen.acs.org/materials/photonics/telecom-demands-grow-optical-fibers/98/i10). *Chemical & Engineering News*. Retrieved May 27, 2020.
9. "Guide To Fiber Optics & Permises Cabling" (http://www.thefoa.org/tech/ref/appln/transceiver.html). The Fiber Optics Association. Retrieved December 22, 2015.
10. "Fiber Optics Market by Application and Region - Global Forecast to 2024 | Technavio" (https://www.businesswire.com/news/home/20201109005774/en/Fiber-Optics-Market-by-Application-and-Region---Global-Forecast-to-2024-Technavio). *BusinessWire*. 2020-11-10. Retrieved 2021-04-18.
11. Novicio, Trish (3 December 2020). "15 Largest Fiber Optic Companies in the World" (https://finance.yahoo.com/news/15-largest-fiber-optic-companies-185636794.html). *finance.yahoo.com*. Retrieved 2021-04-18.

12. "Corning Celebrates Delivering its 1 Billionth Kilometer of Optical Fiber" (https://www.corning.com/optical-communications/worldwide/en/home/products/fiber/milestone.html). Corning. 2017-09-28. Retrieved 2021-11-23.
13. Mary Kay Carson (2007). *Alexander Graham Bell: Giving Voice To The World* (https://archive.org/details/alexandergrahamb0000cars). Sterling Biographies. New York: Sterling Publishing. pp. 76 (https://archive.org/details/alexandergrahamb0000cars/page/76)–78. ISBN 978-1-4027-3230-0.
14. Alexander Graham Bell (October 1880). "On the Production and Reproduction of Sound by Light" (https://zenodo.org/record/1450056). *American Journal of Science*. Third Series. **XX** (118): 305–324. Bibcode:1880AmJS...20..305B (https://ui.adsabs.harvard.edu/abs/1880AmJS...20..305B). doi:10.2475/ajs.s3-20.118.305 (https://doi.org/10.2475%2Fajs.s3-20.118.305). S2CID 130048089 (https://api.semanticscholar.org/CorpusID:130048089). also published as "Selenium and the Photophone" in *Nature*, September 1880.
15. By (2021-02-18). "A Brief History Of Optical Communication" (https://hackaday.com/2021/02/18/a-brief-history-of-optical-communication/). *Hackaday*. Retrieved 2021-04-18.
16. Bhatt, Jaimin; Jones, Adam; Foley, Stephen; Shah, Zaheer; Malone, Peter; Fawcett, Derek; Kumar, Sunil (27 October 2010). "Harold Horace Hopkins: A Short Biography" (https://doi.org/10.1111%2Fj.1464-410X.2010.09717.x). *BJU International*. **106** (10): 1425–1428. doi:10.1111/j.1464-410X.2010.09717.x (https://doi.org/10.1111%2Fj.1464-410X.2010.09717.x). PMID 21049584 (https://pubmed.ncbi.nlm.nih.gov/21049584). S2CID 36285370 (https://api.semanticscholar.org/CorpusID:36285370).
17. Nishizawa, Jun-ichi & Suto, Ken (2004). "Terahertz wave generation and light amplification using Raman effect" (https://books.google.com/books?id=2NTpSnfhResC&pg=PA27). In Bhat, K. N. & DasGupta, Amitava (eds.). *Physics of semiconductor devices*. New Delhi, India: Narosa Publishing House. p. 27. ISBN 978-81-7319-567-9.
18. "Optical Fiber" (https://web.archive.org/web/20090929124200/http://www.city.sendai.jp/soumu/kouhou/s-new-e6/page01.html). *Sendai New*. Archived from the original (http://www.city.sendai.jp/soumu/kouhou/s-new-e6/page01.html) on September 29, 2009. Retrieved April 5, 2009.
19. "New Medal Honors Japanese Microelectrics Industry Leader" (http://www.ieee.org/portal/site/tionline/menuitem.130a3558587d56e8fb2275875bac26c8/index.jsp?&pName=institute_level1_article&TheCat=1003&article=tionline/legacy/inst2003/jun03/6w.nishizawa.xml&). *Institute of Electrical and Electronics Engineers*.
20. Taylor, Nick (2007). *Laser: The Inventor, the Nobel Laureate, the Thirty-year Patent War* (reprint ed.). Universe. pp. 169–171. ISBN 9780595465286.
21. Taylor, Nick (2000). *Laser: The Inventor, the Nobel Laureate, and the Thirty-Year Patent War*. Simon & Schuster. p. 226.
22. Buzzelli, S.; et al. (1980). *Optical fibre field experiments in Italy: COS1, COS2 and COS3/FOSTER* (http://www.chezbasilio.org/immagini/cos1_cos2_cos3_expts.pdf) (PDF). International Conference on Communications. Seattle.
23. Rigby, Pauline (January 22, 2014). "Three decades of innovation" (https://www.lightwaveonline.com/network-design/high-speed-networks/article/16649744/three-decades-of-innovation). *Lightwave*.
24. Grobe, Klaus; Eiselt, Michael (2013). *Wavelength Division Multiplexing: A Practical Engineering Guide (Wiley Series in Pure and Applied Optics)*. Wiley. p. 2.
25. Markoff, John (1997-03-03). "Fiber-Optic Technology Draws Record Stock Value" (https://www.nytimes.com/1997/03/03/business/fiber-optic-technology-draws-record-stock-value.html). *The New York Times*. ISSN 0362-4331 (https://www.worldcat.org/issn/0362-4331). Retrieved 2021-11-09.

26. "14 Tbit/s over a single optical fiber: successful demonstration of world's largest capacity" (http://www.ntt.co.jp/news/news06e/0609/060929a.html). *News release*. NTT. September 29, 2006. Retrieved June 17, 2011.
27. Starr, Michelle (16 July 2021). "With 319 Tb/s, Japan Absolutely Smashes World Record For Data Transmission Speed" (https://www.sciencealert.com/japan-just-absolutely-smashed-the-world-data-transmission-speed-record). *ScienceAlert*. Retrieved 2021-11-09.
28. "The FOA Reference For Fiber Optics - Fiber Optic Transmitters and Receivers -" (https://www.thefoa.org/tech/ref/appln/transceiver.html). *thefoa.org*. Retrieved 2021-04-18.
29. "Ultrafast networks gear-up for deployment" (https://doi.org/10.1038%2Fnphoton.2010.23). *Nature Photonics*. **4** (3): 144. March 2010. Bibcode:2010NaPho...4..144. (https://ui.adsabs.harvard.edu/abs/2010NaPho...4..144.). doi:10.1038/nphoton.2010.23 (https://doi.org/10.1038%2Fnphoton.2010.23). ISSN 1749-4885 (https://www.worldcat.org/issn/1749-4885).
30. Berenguer, P. W.; Nölle, M.; Molle, L.; Raman, T.; Napoli, A.; Schubert, C.; Fischer, J. K. (2016). "Nonlinear Digital Pre-Distortion of Transmitter Components". *Journal of Lightwave Technology*. **34** (8): 1739–1745. Bibcode:2016JLwT...34.1739B (https://ui.adsabs.harvard.edu/abs/2016JLwT...34.1739B). doi:10.1109/JLT.2015.2510962 (https://doi.org/10.1109%2FJLT.2015.2510962). S2CID 47550517 (https://api.semanticscholar.org/CorpusID:47550517) – via IEEE Xplore.
31. Khanna, G.; Spinnler, B.; Calabro, S.; De Man, E.; Hanik, N. (2016). "A Robust Adaptive Pre-Distortion Method for Optical Communication Transmitters". *IEEE Photonics Technology Letters*. **28** (7): 752–755. Bibcode:2016IPTL...28..752K (https://ui.adsabs.harvard.edu/abs/2016IPTL...28..752K). doi:10.1109/LPT.2015.2509158 (https://doi.org/10.1109%2FLPT.2015.2509158). S2CID 6740310 (https://api.semanticscholar.org/CorpusID:6740310) – via IEEE Xplore.
32. Duthel, T.; Hermann, P.; Schiel, J.; Fludger, C. R. S.; Bisplinghoff, A.; Kupfer, T. (2016). "Characterization and Pre-Distortion of Linear and Non-Linear Transmitter Impairments for PM-64QAM Applications" (https://ieeexplore.ieee.org/document/7767721). *42nd European Conference and Exhibition on Optical Communications (ECOC)*: 785–787 – via IEEE Xplore.
33. Alwayn, Vivek (2004-04-23). "Splicing" (http://www.ciscopress.com/articles/article.asp?p=170740&seqNum=9&rl=1). *Fiber-Optic Technologies*. Cisco Systems. Retrieved 2006-12-31. "An optical fiber will break if it is bent too sharply"
34. Charles E. Spurgeon (2014). *Ethernet: The Definitive Guide* (2nd ed.). O'Reilly Media. ISBN 978-1-4493-6184-6.
35. "Fiber Optic Upgrade Will Upturn Yards, Streets" (https://web.archive.org/web/20070927210015/http://observernews.com/stories/current/news/021105/fiber.shtml). *Observer Online*. Archived from the original (http://observernews.com/stories/current/news/021105/fiber.shtml) on 2007-09-27.
36. Halifax Chronicle Herald
37. Cvijetic, Milorad; Djordjevic, Ivan (2013). *Advanced optical communication systems and networks* (https://www.worldcat.org/oclc/875895386). Boston: Artech House. ISBN 978-1-60807-556-0. OCLC 875895386 (https://www.worldcat.org/oclc/875895386).
38. "Infinera Introduces New Line System" (https://web.archive.org/web/20100115090212/http://infinera.com/j7/servlet/NewsItem?newsItemID=108). *Infinera Corp press release*. Archived from the original (http://www.infinera.com/j7/servlet/NewsItem?newsItemID=108) on 2010-01-15. Retrieved 2009-08-26.

39. "Alcatel-Lucent Bell Labs announces new optical transmission record and breaks 100 Petabit-per-second-kilometer barrier" (https://web.archive.org/web/20130718194943/http://www3.alcatel-lucent.com/wps/portal/newsreleases/detail?LMSG_CABINET=Docs_and_Resource_Ctr&LMSG_CONTENT_FILE=News_Releases_2009%2FNews_Article_001797.xml) (Press release). Alcatel-Lucent. 2009-10-28. Archived from the original (http://www.alcatel-lucent.com/wps/portal/newsreleases/detail?LMSG_CABINET=Docs_and_Resource_Ctr&LMSG_CONTENT_FILE=News_Releases_2009/News_Article_001797.xml) on 2013-07-18.
40. "World Record 69-Terabit Capacity for Optical Transmission over a Single Optical Fiber" (http://www.ntt.co.jp/news2010/1003e/100325a.html) (Press release). NTT. 2010-03-25. Retrieved 2010-04-03.
41. Hecht, Jeff (2011-04-29). "Ultrafast fibre optics set new speed record" (https://www.newscientist.com/article/mg21028095.500-ultrafast-fibre-optics-set-new-speed-record.html). *New Scientist*. **210** (2809): 24. Bibcode:2011NewSc.210R..24H (https://ui.adsabs.harvard.edu/abs/2011NewSc.210R..24H). doi:10.1016/S0262-4079(11)60912-3 (https://doi.org/10.1016%2FS0262-4079%2811%2960912-3). Retrieved 2012-02-26.
42. "Laser puts record data rate through fibre" (https://www.bbc.co.uk/news/science-environment-13469924). BBC. 2011-05-22.
43. Hillerkuss, D.; Schmogrow, R.; Schellinger, T.; et al. (2011). "26 Tbit s^{-1} line-rate super-channel transmission utilizing all-optical fast Fourier transform processing". *Nature Photonics*. **5** (6): 364. Bibcode:2011NaPho...5..364H (https://ui.adsabs.harvard.edu/abs/2011NaPho...5..364H). doi:10.1038/NPHOTON.2011.74 (https://doi.org/10.1038%2FNPHOTON.2011.74).
44. "BT Trial 5.6Tbps on a Single Optical Fibre and 2Tbps on a Live Core Link" (https://web.archive.org/web/20230408193304/https://www.ispreview.co.uk/index.php/2016/05/bt-trials-2tbps-and-5-6tbps-speeds-on-fibre-optic-link.html). ISPreview. 2016-05-25. Archived from the original (https://www.ispreview.co.uk/index.php/2016/05/bt-trials-2tbps-and-5-6tbps-speeds-on-fibre-optic-link.html) on 2023-04-08. Retrieved 2018-06-30.
45. "Scientists Successfully Push Fibre Optic Transmissions Close to the Shannon Limit" (https://web.archive.org/web/20230329114100/https://www.ispreview.co.uk/index.php/2016/09/scientists-successfully-push-fibre-optic-data-speeds-close-limit.html). ISPreview. 2016-09-19. Archived from the original (https://www.ispreview.co.uk/index.php/2016/09/scientists-successfully-push-fibre-optic-data-speeds-close-limit.html) on 2023-03-29. Retrieved 2018-06-30.
46. "65Tbps over a single fibre: Nokia sets new submarine cable speed record" (https://arstechnica.com/information-technology/2016/10/nokia-terabits-per-second-cable-speed-record/). ARS Technica. 2016-12-10. Retrieved 2018-06-30.
47. "BT Labs delivers ultra-efficient terabit 'superchannel' " (https://web.archive.org/web/20180804045901/http://home.bt.com/tech-gadgets/future-tech/bt-labs-delivers-ultra-efficient-terabit-superchannel-11364187351803). BT. 2017-06-19. Archived from the original (http://home.bt.com/tech-gadgets/future-tech/bt-labs-delivers-ultra-efficient-terabit-superchannel-11364187351803) on 2018-08-04. Retrieved 2018-08-03.
48. "Researchers just recorded world's fastest internet speed using a single optical chip" (https://web.archive.org/web/20200522162155/https://www.rmit.edu.au/news/all-news/2020/may/Fastest-internet-speed). www.rmit.edu.au. 2020-05-22. Archived from the original (https://www.rmit.edu.au/news/all-news/2020/may/Fastest-internet-speed) on 2020-05-22. Retrieved 2020-05-23.

49. Corcoran, Bill; Tan, Mengxi; Xu, Xingyuan; Boes, Andreas; Wu, Jiayang; Nguyen, Thach G.; Chu, Sai T.; Little, Brent E.; Morandotti, Roberto; Mitchell, Arnan; Moss, David J. (2020-05-22). "Ultra-dense optical data transmission over standard fibre with a single chip source" (https://www.ncbi.nlm.nih.gov/pmc/articles/PMC7244755). *Nature Communications*. **11** (1). Nature: 2568. arXiv:2003.11893 (https://arxiv.org/abs/2003.11893). Bibcode:2020NatCo..11.2568C (https://ui.adsabs.harvard.edu/abs/2020NatCo..11.2568C). doi:10.1038/s41467-020-16265-x (https://doi.org/10.1038%2Fs41467-020-16265-x). PMC 7244755 (https://www.ncbi.nlm.nih.gov/pmc/articles/PMC7244755). PMID 32444605 (https://pubmed.ncbi.nlm.nih.gov/32444605). S2CID 214667352 (https://api.semanticscholar.org/CorpusID:214667352).
50. "London UK Team Achieves Record 178Tbps Single Fibre Speed" (https://web.archive.org/web/20220928194638/https://www.ispreview.co.uk/index.php/2020/08/london-uk-team-achieves-record-178tbps-single-fibre-speed.html). ISPreview. 2020-08-15. Archived from the original (https://www.ispreview.co.uk/index.php/2020/08/london-uk-team-achieves-record-178tbps-single-fibre-speed.html) on 2022-09-28. Retrieved 2021-07-18.
51. "1.53 Petabit per Second Transmission in 55-mode Fiber with Standard Cladding Diameter" (https://www.nict.go.jp/en/press/2022/11/10-1.html). NICT. 2022-11-10. Retrieved 2022-11-11.
52. "Speed record shattered for data transmission over standard optical fiber" (https://newatlas.com/telecommunications/data-transmission-fiber-optics-speed-record/). New Atlas. 2022-11-10. Retrieved 2022-11-11.
53. "Speed record shattered for data transmission over standard optical fiber" (https://web.archive.org/web/20221111223050/https://www.ispreview.co.uk/). ISPreview. 2022-11-12. Archived from the original (https://www.ispreview.co.uk/) on 2022-11-11. Retrieved 2022-11-11.
54. "NEC and Corning achieve petabit optical transmission" (http://optics.org/news/4/1/29). Optics.org. 2013-01-22. Retrieved 2013-01-23.
55. "Big data, now at the speed of light" (https://www.newscientist.com/article/mg21729104.900). New Scientist. 2013-03-30. Retrieved 2018-08-03.
56. Anthony, Sebastian (March 25, 2013). "Researchers create fiber network that operates at 99.7% speed of light, smashes speed and latency records - ExtremeTech" (https://www.extremetech.com/computing/151498-researchers-create-fiber-network-that-operates-at-99-7-speed-of-light-smashes-speed-and-latency-records). *Extremetech*.
57. "A Single Laser and Cable Delivers Fibre Optic Speeds of 43Tbps" (https://web.archive.org/web/20230404073827/https://www.ispreview.co.uk/index.php/2014/08/record-single-laser-delivers-fibre-optic-speeds-43tbps.html). ISPreview. 2014-07-03. Archived from the original (https://www.ispreview.co.uk/index.php/2014/08/record-single-laser-delivers-fibre-optic-speeds-43tbps.html) on 2023-04-04. Retrieved 2018-06-30.
58. "255Tbps: World's fastest network could carry all of the internet's traffic on a single fiber" (https://www.extremetech.com/extreme/192929-255tbps-worlds-fastest-network-could-carry-all-the-internet-traffic-single-fiber). *ExtremeTech*. 2014-10-27. Retrieved 2018-06-30.
59. "Realization of World Record Fiber-Capacity of 2.15Pb/s Transmission" (http://nict.go.jp/en/press/2015/10/13-1.html). NICT. 2015-10-13. Retrieved 2018-08-25.
60. "One Petabit per Second Fiber Transmission over a Record Distance of 200 km" (https://web.archive.org/web/20180630185713/http://www.ntt.co.jp/news2017/1703e/pdf/170323a.pdf) (PDF). NTT. 2017-03-23. Archived from the original (http://www.ntt.co.jp/news2017/1703e/pdf/170323a.pdf) (PDF) on 2018-06-30. Retrieved 2018-06-30.
61. "Success of ultra-high capacity optical fibre transmission breaking the world record by a factor of five and reaching 10 Petabits per second" (http://global-sei.com/company/press/2017/prs097.pdf) (PDF). Global Sei. 2017-10-13. Retrieved 2018-08-25.

62. "Researchers in Japan 'break transmission record' over 1,045km with three-mode optical fibre" (https://www.fibre-systems.com/news/researchers-japan-break-transmission-record-over-1045km-three-mode-optical-fibre). Fibre Systems. 2018-04-16. Retrieved 2018-06-30.
63. "New World Record as Fibre Optic Speeds Pushed to 319Tbps" (https://web.archive.org/web/20230404030320/https://www.ispreview.co.uk/index.php/2021/07/new-world-record-as-fibre-optic-speeds-pushed-to-319tbps.html). ISPreview. 2021-07-16. Archived from the original (https://www.ispreview.co.uk/index.php/2021/07/new-world-record-as-fibre-optic-speeds-pushed-to-319tbps.html) on 2023-04-04. Retrieved 2021-07-18.
64. "World's First Successful Transmission of 1 Petabit per Second in a Standard Cladding Diameter Multi-core Fiber" (https://www.nict.go.jp/en/press/2022/05/30-1.html). NICT. 2022-05-30. Retrieved 2022-11-11.
65. "New Record Fibre Optic Speed of 1.02Pbps Hit Over 51.7km" (https://web.archive.org/web/20221111215836/https://www.ispreview.co.uk/index.php/2022/06/new-record-fibre-optic-speed-of-1-02pbps-hit-over-51-7km.html). ISPreview. 2022-06-07. Archived from the original (https://www.ispreview.co.uk/index.php/2022/06/new-record-fibre-optic-speed-of-1-02pbps-hit-over-51-7km.html) on 2022-11-11. Retrieved 2022-11-11.
66. "Blistering data transmission record clocks over 1 petabit per second" (https://newatlas.com/telecommunications/1-petabit-per-second-data-transmission/). newatlas. 2022-06-01. Retrieved 2022-11-11.
67. Jørgensen, A. A.; Kong, D.; Henriksen, M. R.; Klejs, F.; Ye, Z.; Helgason, Ò. B.; Hansen, H. E.; Hu, H.; Yankov, M.; Forchhammer, S.; Andrekson, P.; Larsson, A.; Karlsson, M.; Schröder, J.; Sasaki, Y.; Aikawa, K.; Thomsen, J. W.; Morioka, T.; Galili, M.; Torres-Company, V.; Oxenløwe, L. K. (2022-10-20). "Petabit-per-second data transmission using a chip-scale microcomb ring resonator source" (https://www.nature.com/articles/s41566-022-01082-z.epdf). *Nature Photonics*. **16** (11). Nature: 798–802. Bibcode:2022NaPho..16..798J (https://ui.adsabs.harvard.edu/abs/2022NaPho..16..798J). doi:10.1038/s41566-022-01082-z (https://doi.org/10.1038%2Fs41566-022-01082-z). S2CID 253055705 (https://api.semanticscholar.org/CorpusID:253055705). Retrieved 2022-10-23.
68. "Record 1.84 Petabit/s Data Transfer Achieved With Photonic Chip, Fibre Optic Cable" (https://www.tomshardware.com/news/record-184-petabit-per-second-data-transfers-achieved-using-photonic-chip-and-fiber-optic-cable). Tom's Hardware. 2022-10-20. Retrieved 2022-10-23.
69. Hu, Hao; Da Ros, Francesco; Pu, Minhao; Ye, Feihong; Ingerslev, Kasper; Porto Da Silva, Edson; Nooruzzaman, Md.; Amma, Yoshimichi; Sasaki, Yusuke; Mizuno, Takayuki; Miyamoto, Yutaka; Ottaviano, Luisa; Semenova, Elizaveta; Guan, Pengyu; Zibar, Darko; Galili, Michael; Yvind, Kresten; Morioka, Toshio; Oxenløwe, Leif K. (2018-07-02). "Single-source chip-based frequency comb enabling extreme parallel data transmission" (https://backend.orbit.dtu.dk/ws/files/171525555/NPHOT_manuscript_comb_for_extreme_parallel_data_accepted_version_with_fi.._.pdf) (PDF). *Nature Photonics*. **12** (8). Nature Photonics (volume 12, pages 469–473): 469–473. Bibcode:2018NaPho..12..469H (https://ui.adsabs.harvard.edu/abs/2018NaPho..12..469H). doi:10.1038/s41566-018-0205-5 (https://doi.org/10.1038%2Fs41566-018-0205-5). S2CID 116723996 (https://api.semanticscholar.org/CorpusID:116723996).
70. "Groundbreaking new technology could allow 100-times-faster internet by harnessing twisted light beams" (https://phys.org/news/2018-10-groundbreaking-technology-times-faster-internet-harnessing.html). Phys.org. 2018-10-24. Retrieved 2018-10-25.

71. Yue, Zengji; Ren, Haoran; Wei, Shibiao; Lin, Jiao; Gu, Min (2018-10-24). "Angular-momentum nanometrology in an ultrathin plasmonic topological insulator film" (https://www.ncbi.nlm.nih.gov/pmc/articles/PMC6200795). *Nature Communications*. **9** (1). Nature Communications (volume 9, Article number: 4413): 4413. Bibcode:2018NatCo...9.4413Y (https://ui.adsabs.harvard.edu/abs/2018NatCo...9.4413Y). doi:10.1038/s41467-018-06952-1 (https://doi.org/10.1038%2Fs41467-018-06952-1). PMC 6200795 (https://www.ncbi.nlm.nih.gov/pmc/articles/PMC6200795). PMID 30356063 (https://pubmed.ncbi.nlm.nih.gov/30356063).
72. Christopher C. Davis. "Fiber Optic Technology and its Role in the Information Revolution" (https://user.eng.umd.edu/~davis/optfib.html).
73. Paschotta, Dr Rüdiger. "Optical Fiber Communications" (https://www.rp-photonics.com/optical_fiber_communications.html). *rp-photonics.com*.
74. Lee, M. M.; J. M. Roth; T. G. Ulmer; C. V. Cryan (2006). "The Fiber Fuse Phenomenon in Polarization-Maintaining Fibers at 1.55 μm" (https://web.archive.org/web/20110717065456/http://www.toddulmer.com/work/lee_ulmerCLEO2006.pdf) (PDF). *Conference on Lasers and Electro-Optics/Quantum Electronics and Laser Science Conference and Photonic Applications Systems Technologies*. paper JWB66. Optical Society of America. Archived from the original (http://www.toddulmer.com/work/lee_ulmerCLEO2006.pdf) (PDF) on July 17, 2011. Retrieved March 14, 2010.
75. McAulay, Alastair D. (2011). *Military Laser Technology for Defense: Technology for Revolutionizing 21st Century Warfare*. John Wiley & Sons. ISBN 9781118019542. "Optical sensors are advantageous in hazardous environments because there are no sparks when a fiber breaks or its cover is worn."

- Encyclopedia of Laser Physics and Technology (http://www.rp-photonics.com/optical_fiber_communications.html)
- Fiber-Optic Technologies (http://www.ciscopress.com/articles/article.asp?p=170740&seqNum=1&rl=1) by Vivek Alwayn
- Agrawal, Govind P. (2002). *Fiber-optic communication systems*. New York: John Wiley & Sons. ISBN 978-0-471-21571-4.

Further reading

- Keiser, Gerd. (2011). *Optical fiber communications*, 4th ed. New York: McGraw-Hill, ISBN 9780073380711
- Senior, John. (2008). *Optical Fiber Communications: Principles and Practice*, 3rd ed. Prentice Hall. ISBN 978-0130326812

External links

- "Understanding Optical Communications" (https://web.archive.org/web/20061230102529/http://www.redbooks.ibm.com/pubs/pdfs/redbooks/sg245230.pdf) An IBM redbook
- Fiber Optics - Internet, Cable and Telephone Communication (https://sites.google.com/site/fiberopticsuncovered/) Archived (https://web.archive.org/web/20161022110424/https://sites.google.com/site/fiberopticsuncovered/) 2016-10-22 at the Wayback Machine

---

Retrieved from "https://en.wikipedia.org/w/index.php?title=Fiber-optic_communication&oldid=1226125605"